

SLICK6SQM-V5

Efficiency Meets SQ

Following on from the success of our award-winning SLICK series speakers, the all-new SLICK SQ range takes performance to the next level. With 100W RMS power handling, a shallow 61mm mounting depth and a frequency response extending from 54Hz to 10kHz, the SLICK SQ is designed to deliver serious performance while remaining incredibly easy to integrate into a wide range of audio systems. Designed for enthusiasts who demand exceptional sound quality without sacrificing efficiency, the SLICK SQ delivers over 94dB sensitivity, allowing impressive output from even modest amplifier power.

At the heart of the design is an oversized motor assembly, engineered to provide superior cone control, improved transient response and greater accuracy across the frequency range. This enhanced motor strength allows the driver to react faster to musical dynamics, reproducing everything from subtle vocal details to hard-hitting percussion with remarkable precision.

The result is a speaker that combines the effortless efficiency that made the original SLICK range so popular with a more refined, detailed and engaging listening experience, setting a new benchmark for performance in its class.




BEST SOUND - Made from high quality soft parts and oversized moment the slick SQ speakers deliver unparalleled sound.

PREMIUM DESIGN - Eurofit basket provides maximum installation compatibility. Finished in a sleek black design. With some high quality crossovers to tie the SQ package together.

GREAT EFFICIENCY - With an sensitivity of 94dB little power is needed to get significant output from these speakers meaning the majority users will be able to get the most from there system

REPLACE WITH BEST PERFORMANCE - Designed around the ever popular SLICK series speaker but with added motor size delivering more bass, ideal for adding a dedicated midrange speaker to any system

Model	SLICK6SQM-V5
Type	Midrange Speaker
Speaker Size	6.5" (165mm)
Peak/RMS	300W/100W
Sensitivity	94dB
Freq. Response	54Hz - 25kHz
Impedance	4 Ω
Mounting Depth	2.4" (61mm)
Mounting Diameter	5.6" (142mm)
Grille included	No

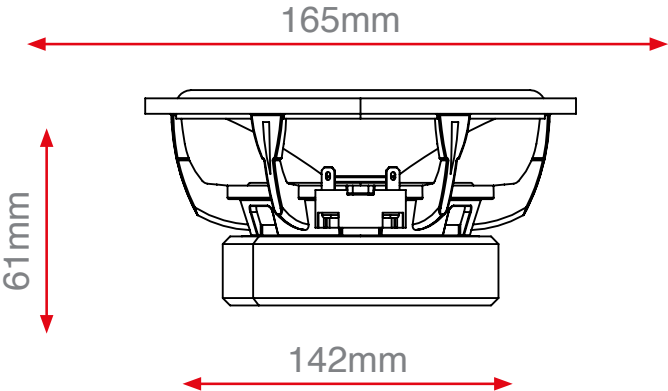



6.5” Component Speaker



FOAM SURROUND

High density heat pressed foam with wide roll surround to give an accurate and precise bass response while aiding high excursion.



FEMM MOTOR


Oversized FEMM (Finite Element Method Magnetics) designed motor delivers high motor force



SQ FOCUS

Following the slicks core values but applying them to a more SQ oriented speaker. Bring performance to a new price range

Impedance VS Frequency

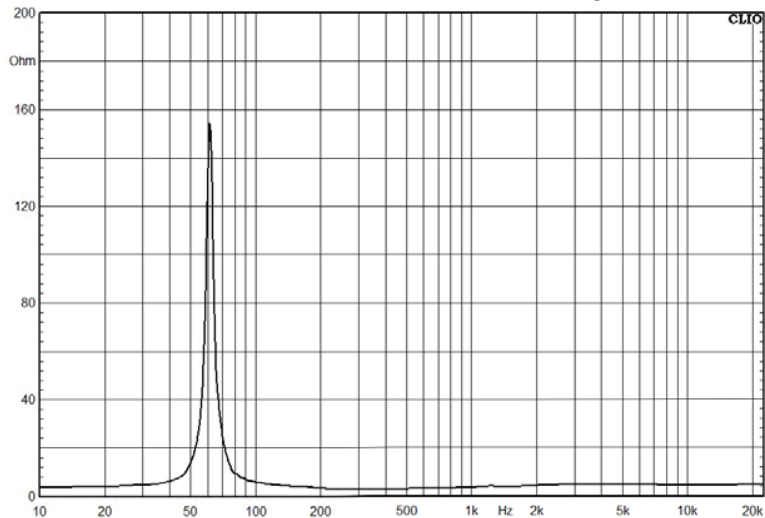

Speaker Extras

- Multi-FIT euro basket

